

STEEL TIE HINGED DERAIL

Sizing Form for Derail Frame and Base Plate


Please fill in the information below to ensure your product is correctly sized.

Upon receipt of questionnaire, we will send you a drawing of base plate for your approval.


Please sign and return the drawing with your purchase order.

If you are ordering a SideKick Derail Booster with a derail, we will use the sizing information on this form for both products


1. DERAIL MODEL



LEFT
4014-01



RIGHT
4014-02




2-WAY
4014-03


2. RAIL HEIGHT

Measure carefully.

From top of tie to top of rail. Derail and base plate must fit your rail height exactly. Include insulating pad thickness if your rail is insulated.

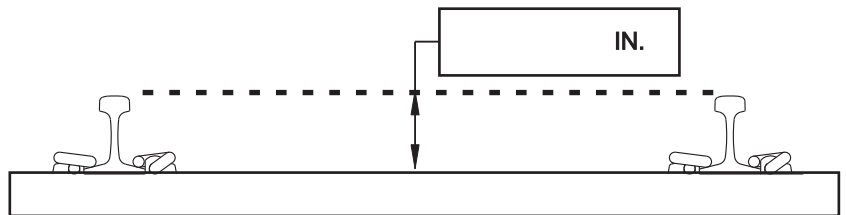

3. TIE SPACING (CENTER-CENTER)

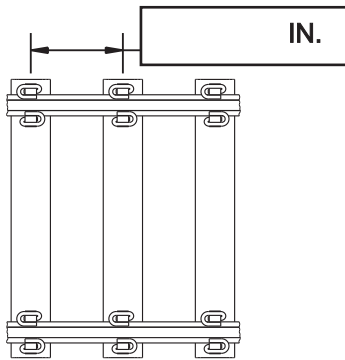

4. IS YOUR RAIL

- INSULATED
- NON-INSULATED
- STRAIGHT
- CURVED

For best performance, whenever possible, derails should be installed on the outer curved rail. **If you must install the derail on the inner curved rail, you should consider adding a Side Kick Derail Booster on the outer curved rail to help the derail do its work.**

NOTICE:

Base plate and derail base will be custom-made to suit your rail height. We will send you formal drawings for signed approval.

Goods are not returnable once sold.

5. ARE RAILS

- exposed to ties?
- flush with pavement?

please contact us if your rail is flush ... a derail may not be effective on flush rail.

6. STEEL TIE DATA

BRAND: _____

MODEL: _____

Company _____

Your Name _____

P.O. _____

Date _____

Phone _____

Fax _____

PLEASE FAX TO 847.623.6139